# *HT209*

## Handpistol cutter flat cable

User's Guide

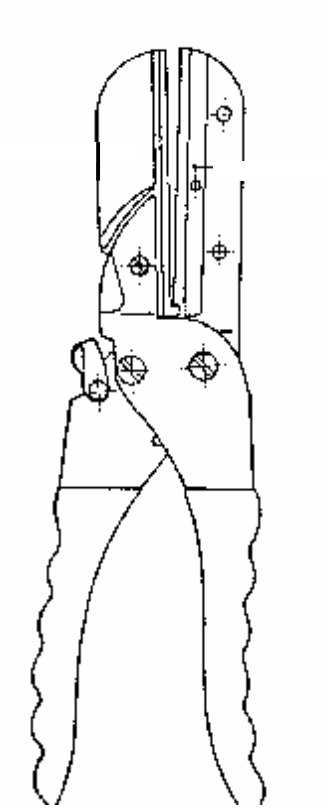

Föhrenbach®
Application Tooling

Föhrenbach®
Application Tooling

## CONTENTS

1. DESCRIPTION ..... 3

2. SPECIFICATIONS ..... 4

2.1 Product information ..... 4

2.2 Identity data ..... 4

3. OPERATING INSTRUCTIONS ..... 4

4. PARTS ..... 4

5. CONTACT ..... 4

# 1. DESCRIPTION

The Cable Shear hand tool HT 209 is designed to cut Flat Cable with a width of 81.5 mm maximum.

The cutter (item 1) and the pressure plate (item 2) can be exchanged.

For part numbers see parts list (4.)

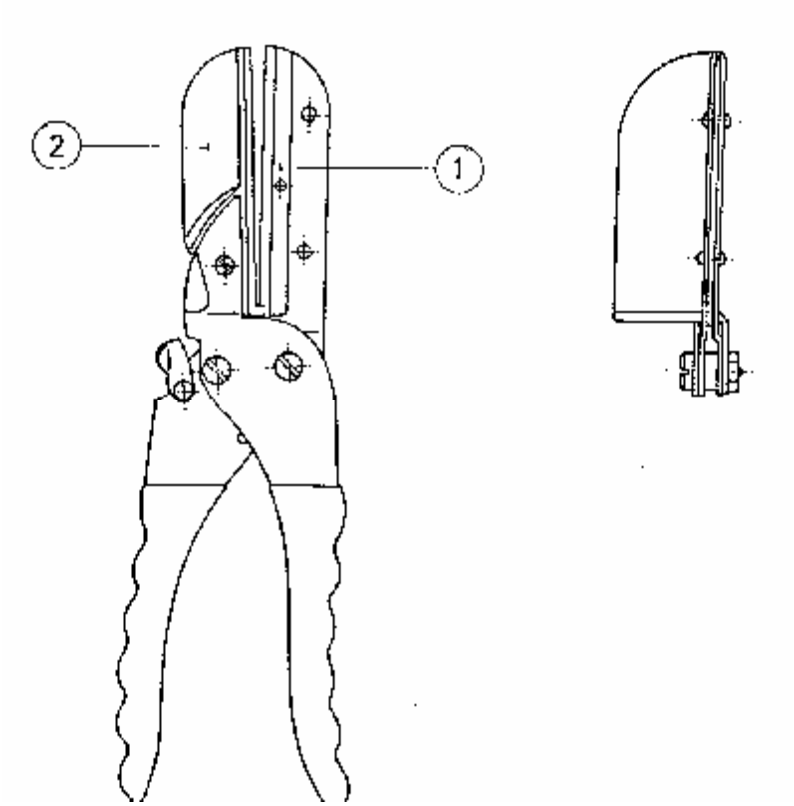


Figure 1: HT 209 Cable Shear Handtool

Föhrenbach®
Application Tooling

# 2. SPECIFICATIONS

## 2.1 Product information

All types of Flat Cables can be used with a maximum width of 81.5 mm.

## 2.2 Identity data

Dimensions

- ◊ Length 244 mm
- ◊ Width (open) ca. 88 mm
- ◊ Width (closed) ca. 58 mm
- ◊ Height 39 mm
- ◊ Cutter length 81.5 mm

# 3. OPERATING INSTRUCTIONS

1. Take the tool in your right hand with the cable alignment plate on the left side.
2. Unlock the tool and feed the desired length of cable under the tool blade.
3. Place the cable edge against the alignment plate edge to insure proper perpendicular cut, actuate the tool.
4. The cable is now ready for assembly.

# 4. PARTS see table

| item no | part No | description | qty per assy |
|---|---|---|---|
| 1 | 190572 | Cutter with spring dowel φ 2.5x5 (DIN 1481) | 1 |
| 2 | 190573 | Pressure plate with screw M4x8 and nut M4 | 1 |

# 5. CONTACT

Föhrenbach Application Tooling
Krijgsbaan 128
2640 Mortsel
Belgium

e-mail: Application.tooling@foehrenbach.be

The technical data in this publication has been carefully checked and assembled. No liability from inaccuracies or errors is assumed. The right to change or improve this document without notice is reserved.